

## UGL2430-UHM (1T1R)

### Wireless-N 150Mbps USB2.0 Adapter

Delivers Faster Speed and Farther Range for Wireless Connection



#### FEATURES

- Wi-Fi compliant with IEEE 802.11n standard for up to 150Mbps receiver & transmit data rate.
- 802.11e Compatible bursting and I standards
- Fully backward compatible with IEEE802.11g / 11b
- Supports high speed USB 2.0/1.1/1.0 bus interface
- 1T1R SISO technology improves wireless coverage
- Delivers 3x faster speed than IEEE802.11b/g
- Seamless roaming among 802.11n/g/b networks
- Operation at 2.4 GHz frequency ISM band
- Support 64/128-bit WEP (Wired Equivalent Privacy)
- Supports advance network security of WEP, 802.1X, WPA/WPA2-PSK, WPA/WPA2-EAP, AES, TKIP
- Quick setup wizard and Web based user interface for easy management and configuration
- Supports Ad-Hoc (Peer to Peer) communication and Infrastructure mode with Access Point
- Supports most popular operating systems including Windows 7 / XP/ Vista / Linux and Mac
- Convenience site survey function and profiles
- Innovative mini and elegant design

#### Package Contents

- One Wireless 150Mbps USB Adapter
- One Setup Utility CD-ROM
- Quick Installation Guide (QIG)

#### OVERVIEW

Up to 150Mbps faster wireless speed UGL2430-UHM is a mini-size Wireless-N USB Adapter with IEEE 802.11n compatible that is fully backward compatible with IEEE802.11g/b standards. Therefore, it is an ideal device for home and SOHO networking to share high speed internet connection, files, printers, and multimedia communications with the flexibility, speed and security you need.

The Wireless-N USB Adapter installs in most desktop or notebooks and lets you put your computer almost anywhere in the building. In order to solve weakness of wireless signal problem, enhanced SISO technology enables you to very easily extend the range of your wireless network up to 4 times farther wireless range than regular IEEE802.11b/g standard.

This Wireless-N USB Adapter comes with software drivers for the most popular Microsoft Windows operating systems and can be integrated into a larger network, running Windows, Mac, Linux in either Ad Hoc mode (without an Access Point) or Infrastructure mode (with an Access Point).

WEP encryption and Wi-Fi Protected Access (WPA), and further enhanced with 802.1x authentication security. With drivers and utility available for most commonly used Windows OS. The 2.4GHz 802.11n/g/b Wireless USB Adapter is a truly solid-design networking device that provides you with the ultimate freedom of wireless networking anywhere.


A setup wizard is provided as the part of the web configuration utility. You can simply follow the step-by-step process to get your wireless USB adapter configuration ready to run in few easy steps.

**SPECIFICATIONS**

<b>Wireless LAN Specifications</b>	
<b>Wireless Standards</b>	IEEE 802.11n ( e & i ) IEEE 802.11g IEEE 802.11b
<b>Host Interface</b>	High speed USB2.0/1.1 interface
<b>Data Rate</b>	802.11n: up to 150Mbps 802.11g: 54 / 48 / 36 / 24 / 18/ 12 / 9 / 6 Mbps auto fallback 802.11b: 11 / 5.5 / 2 / 1 Mbps auto fallback
<b>Frequency Band</b>	2.4GHz ISM (Industrial Scientific Medical) Band
<b>Chipset</b>	RTL8188CUS
<b>RF Frequency</b>	2412 ~ 2484 MHz
<b>Spread Spectrum</b>	IEEE 802.11b : DSSS (Direct Sequence Spread Spectrum) IEEE 802.11g/n: OFDM (Orthogonal Frequency Division Multiplexing)
<b>Radio Channel</b>	1 ~ 14 channels (Japan) 1 ~ 13 channels (ETSI, European Countries) 1 ~ 11 channels (North America) 1 ~ 9 channels (France Outdoor) 3 ~ 9 channels (Israel) 10 ~ 11 channels (Mexico)
<b>Operation Range</b>	Indoor : up to 100 meters Outdoor : up to 300 meters
<b>Antenna type</b>	Integrated Antenna
<b>Power Consumption</b>	Transmit : average 305mA Receive : average 190mA
<b>RF Output Power</b>	<14dBm@11n, <14dBm@11g, <17dBm@11b
<b>Receiver Sensitivity</b>	11Mbps -80dBm@8% ; 54Mbps -70dBm@10% ; 130Mbps -70dBm@10%
<b>Modulation</b>	11n: BPSK, QPSK, 16QAM, 64QAM with OFDM 11g: BPSK, QPSK, 16QAM, 64QAM, OFDM 11b: DQPSK, DBPSK, DSSS, CCK
<b>Data Security</b>	64/128-bit WEP Encryption WPA, WPA-PSK, WPA2, WPA2-PSK, TKIP/AES
<b>Network</b>	Auto-switch to use 802.11n or 802.11g or 802.11b mode Supports Ad-Hoc and Infrastructure WLAN network Wireless roaming Data rate auto fall-back under noisy environment or longer range distance Site Survey with Profile function
<b>LED Indicator</b>	Power
<b>Operating System</b>	Windows 7 / XP / Vista Power CPU Mac OSX: 10.4, 10.5; Intel CPU Mac OS: 10.4, 10.5, 10.6 Mac 10.4, 10.5, 10.6; Linux V2.6 0005 20091112.P4
<b>Weight</b>	5g (net)
<b>Dimension</b>	23.5 (L) x 14.4 (W) x 5.8 (H) mm
<b>Environment</b>	Operating Temperature: 0°C to 50°C Storage Temperature: -10°C to 70°C Humidity: 5% ~ 90% (Non Condensing)
<b>Compliant</b>	CE Mark (Europe) RoHS Compliant Wi-Fi Compliant

**APPLICATION DIAGRAM**

**Infrastructure Mode Application Diagram**

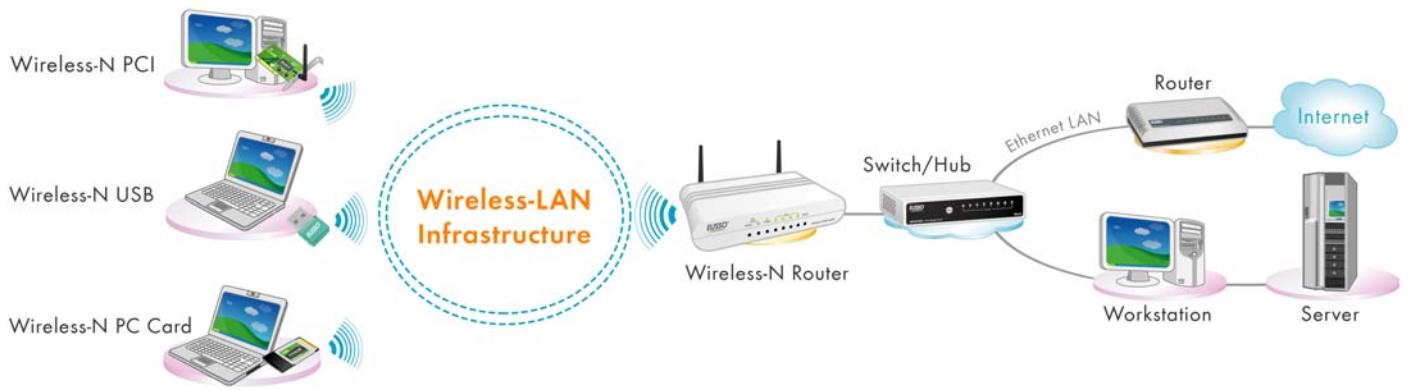


The AP Router establishes an infrastructure mode for networking between all wireless clients and Ethernet resources to the Internet.

**Wireless Ad-hoc Application Diagram**



The wireless Ad-hoc mode is established by several wireless clients, which have the same SSID and radio channel. The wireless USB / PCI / PC Card adapters can be used for such peer-to-peer communication mode.

**Authentication with 802.1x and RADIUS Server**

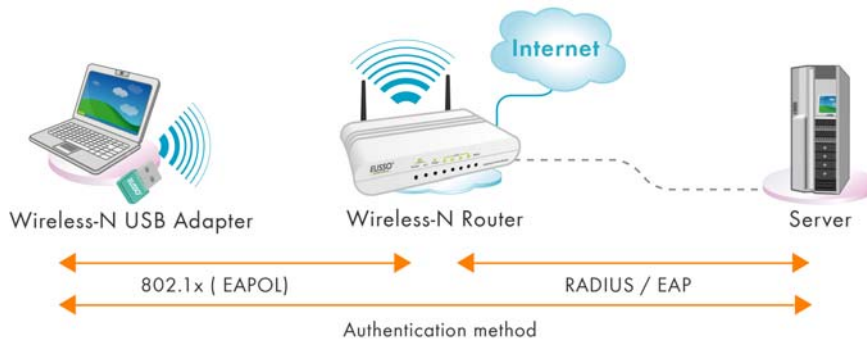

When wireless station accessing the network, the AP router provide 802.1x support to check with RADIUS authentication Server to authorize user's access.

**ORDERING INFORMATIONS**

Model	Description
UGL2430-UHM	150Mbps Mini Wireless-N USB2.0 Adapter (1T1R)

*EUSSO Technologies, Inc. is a dedicated data communication and networking company. With professional experiences in design, production, marketing and service support, we deliver the full range networking products including Gigabit Ethernet, Fiber Optic, Wireless LAN, Switches, Hubs, LAN cards, PCMCIA adapters, Converter, Transceivers. As well as Internet Telephony Gateway, Print Servers, Internet Sharing Servers and many others.*

2012/8/9 ver 1.0F



**EUSSO Technologies, Inc.**

6F, No.389, Sec.2, Chung Shan Road, Chung Ho City, Taipei 235-58, Taiwan

TEL:+886 (2) 8221-4616 E-mail:sales@eusso.com

FAX:+886 (2) 8221-4607 http://www.eusso.com