



UKS8104-D4

4-Port PS/2 KVM Switch Desktop Metal Case

4-Port KVM Switch + 4 Cables

FEATURES

- Supports Microsoft Intellimouse , MicroSoft Intellimouse Explorer, Logitech Net Mouse, and the other Microsoft compatible mouse
- Supports hot plug function for adding or removing PCs without powering down the KVM switch or PCs
- Works with DOS, Win3.X, Win95 /98 /98SE /2000 /ME /XP, /NT, Netware, SCO Unix, HP UNIX, Linux
- Very high video quality - up to 1920x1440
- High bandwidth: 200MHz
- No software required - easy PC selection via push buttons or hot keys
- Auto scan mode for monitoring PCs
- Keyboard status restored when switching PCs
- LED Display for easy status monitoring for active PC
- Buzzer sound for switching port confirmation
- Works with or without external power adapter
- Uses inexpensive and commonly available cables
- Desktop metal case compact size design

OVERVIEW


The UKS8104-D KVM Switch is an electronic switching device for controlling four PCs from one PS/2 Keyboard, one PS/2 Mouse and one VGA Monitor. The KVM switch has complete keyboard and mouse emulation for simultaneous PCs boot-up process. To switch between PCs can be accomplished in two ways: through keyboard "Hot Key" commands or by using the convenient "Select" push button control.

The KVM switch provides the best convenience for users who have multiple desktop computers and/or notebooks; or power users who need control multiple servers from one console. It saves your equipment cost, time, space, power, and provides the best convenience of operation.

SPECIFICATIONS

System Specifications	
PC Port	4
Console Port	1
Maximum PC Connections	4
LED Indicators	4
PC Port Connector (All Female Type)	PS/2 Keyboard mini Din 6 pin PS/2 Mouse mini Din 6 pin VGA HDDB 15 pin
Console Port Connector (All Female type)	PS/2 Keyboard mini Din 6 pin PS/2 Mouse mini Din 6 pin VGA HDDB 15 pin
PC Selection	Hot Key / Button
On Screen Display Control	No
Scan Intervals	8 seconds
Keyboard Emulation	PS/2
Mouse Emulation	PS/2
VGA Resolution	1920 x 1440
Bandwidth	200MHz
Daisy Chain and Levels	No
Weight	720g
Dimension	200(L) x 98(W) x 44(H) mm, Desktop Metal Case
Emission	FCC Class B, CE
Environment	
Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Operating Humidity	10% to 90% Non-Condensing
Storage Humidity	0% to 95% Non-Condensing

Application Diagram

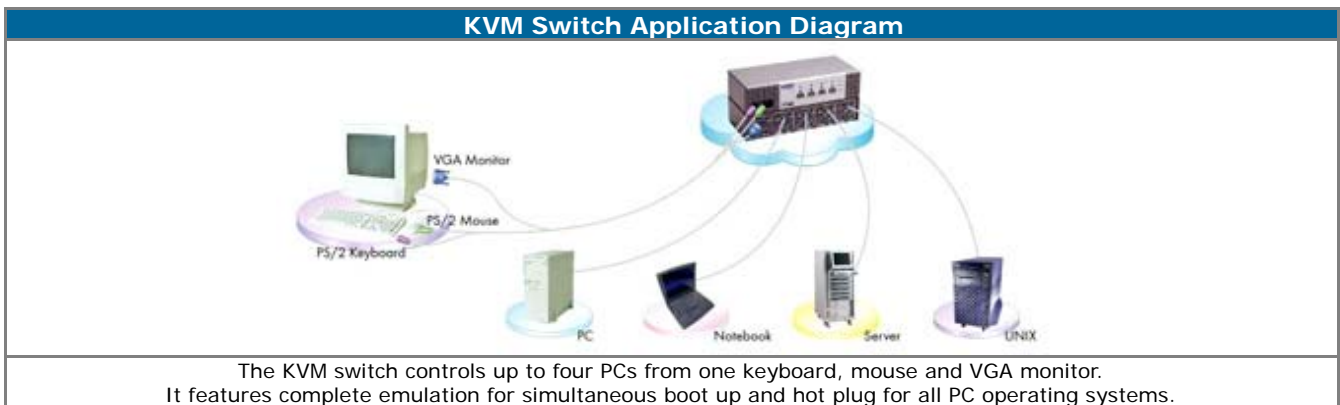

ORDERING INFORMATION

Model	Description
UKS8104-D4	4-Port PS/2 KVM Switch, Desktop Metal Case

EUSSO Technologies, Inc. is a dedicated data communication and networking company. With professional experiences in design, production, marketing and service support, we deliver the full range networking products including Gigabit Ethernet, Fiber Optic, Wireless LAN, Switches, Hubs, LAN cards, PCMCIA adapters, Converter, Transceivers. As well as Internet Telephony Gateway, Print Servers, Internet Sharing Servers and many others.

UKS8104-D4 v1.0

EUSSO Technologies, Inc.

Tel: +886-2-8221-4616

Email: sales@eusso.com

6F, No.389, Sec.2, Chung Shan Road, Chung Ho City, Taipei 235 Taiwan, R.O.C.

Fax: +886-2-8221-4607

<http://www.eusso.com>